



L-ACOUSTICS Q-SYS PLUG-IN FOR 16-CHANNEL AMPLIFIED CONTROLLERS

technical bulletin - v.2.3

Introduction

The L-Acoustics Q-SYS plug-in for 16-channel Amplified Controllers allows integrating L-Acoustics sound reinforcement systems in projects where highly customizable user interface or monitoring solutions are required and addressed using QSC Q-SYS platform.

Supported device types: LA7.16i, LA7.16

The L-Acoustics Q-SYS plug-in version 1.8.3 is compatible with Q-SYS Designer software from minimum version 8.1.0.

Release notes (February 2025 - version 1.8.3.0)

New features

QP-137	Support of firmware 2.15
--------	--------------------------

Fixed issues

History of public releases

- October 2024 - version 1.8.2
 - Support of AES67 network redundancy on LA7.16i
 - Support of firmware 2.14
 - Report detailed PAVA Pilote Tone errors for discrete inputs
- June 2024 - version 1.8.1
 - Support of AES67 on LA7.16i
- February 2024 - version 1.7.2
 - Support of firmware 2.13
- November 2022 - version 1.7.0
 - Set IP address at runtime instead of through design-time property
 - Disable controls for empty outputs (no enclosure)
- August 2022 - version 1.6.0
 - First release

Compatibility

Device Compatibility

L-Acoustics Q-SYS plug-in version	LA7.16i Firmware versions	Drive System Release	Q-SYS Designer minimum version
1.8.3	From: 2.12.0 To: 2.15.x	From: Sept. 2017	8.1.0
1.8.2	From: 2.12.0 To: 2.14.x	From: Sept. 2017 To: Nov. 2024	8.1.0
1.8.1, 1.7.2	From: 2.12.0 To: 2.13.x	From: Sept. 2017 To: June 2024	8.1.0
1.7.0, 1.6.0	From: 2.12.0 To: 2.12.x	From: Sept. 2017 To: Sept. 2023	8.1.0

Features Compatibility

Feature	Compatible Devices	Minimum Firmware version	Minimum Drive System Release	L-Acoustics Q-SYS plug-in minimum version
AES67	LA7.16i	2.13.3.11	June 2024	1.8.1
AES67 redundancy	LA7.16i	2.14.0.11	October 2024	1.8.2

Installing the L-Acoustics Q-SYS plug-in for 16-channel Amplified Controllers

The L-Acoustics Q-SYS plug-in for 16-channel Amplified Controllers is available in the Q-SYS Asset Manager as **L-Acoustics Amplified Controller 16 channels**.


Use the Q-SYS Asset Manager **Version**, **Install**, **Update** and **Remove** functions to manage the plug-in versions in the local Q-SYS Designer plug-ins library.

Updating existing designs

When opening an existing design created with another version of a plug-in, Q-SYS Designer asks which plug-in version to keep for this design.

It is possible to save the design with a past version of the plug-in even if the plug-in was deleted. The whole plug-in is included in the design when saving.

When asked, either click **Use Design Plugin** for the past version or click **Use Installed Plugin** for the latest version.

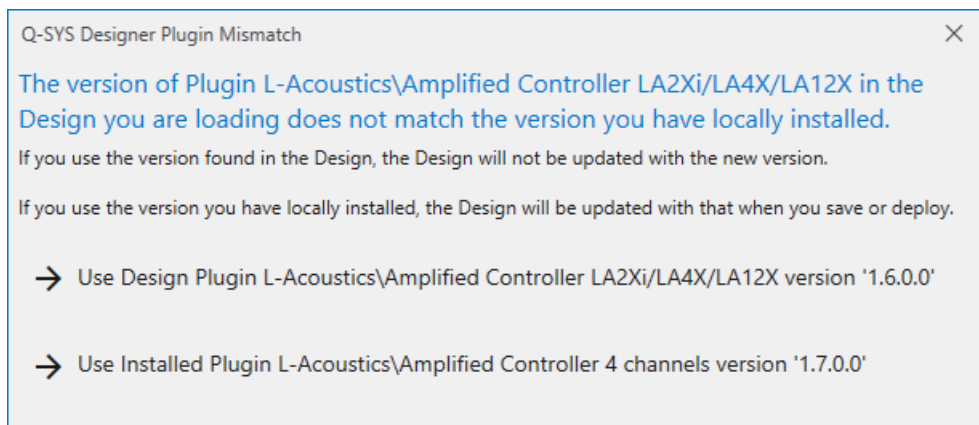

Each new release is backward compatible with previous versions.


With the **Use Installed Plugin** option, the dialog pops up as many times as there are instances of the plug-in in the design. This is Q-SYS Designer expected behavior.

 When the **Q-SYS Designer Plugin Mismatch** dialog opens while connected to a hardware Q-SYS Core, and the option **Use Installed Plugin** is selected, the plug-ins are updated locally in Q-SYS Designer with the newest version, but it is required to trigger **Save to Core & Run** afterwards in order to also update the design running inside the Q-SYS Core. Failing to do so will result in an unpredictable behavior of the plug-ins.

Component description

Drag the plug-in from **Schematic Elements** to the design.

Clicking the Component block in the design displays its **Properties**.

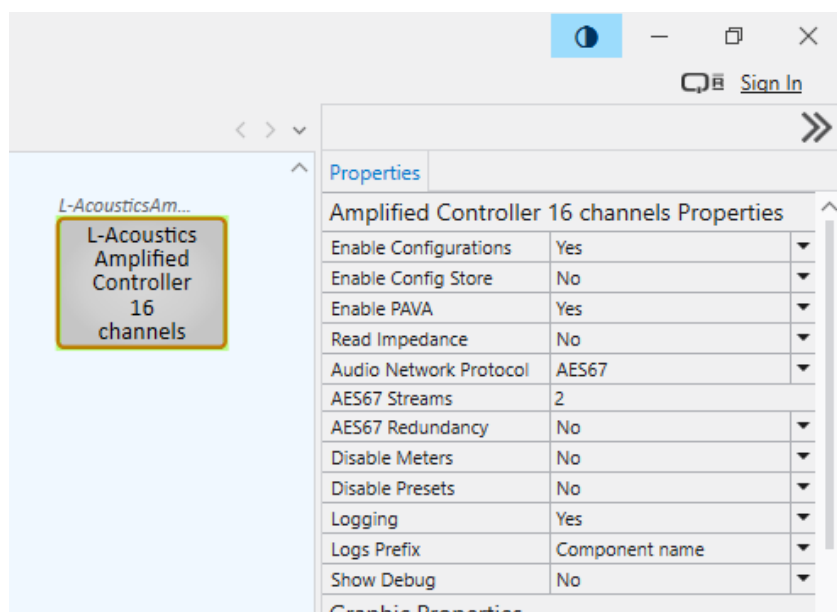

Enable Configurations

enable the possibility to recall configurations (preset and group parameters) stored inside the amplified controller. Refer to amplified controller owner's manual for more information about preset and group parameters.



Never recall configurations when LA Network Manager is connected to the device, or setting conflicts will occur. The configuration recall function is designed to substitute for LA Network Manager supervision. Therefore LA Network Manager must not be used when recalling configurations, or must be set to offline mode or disconnected.

Enable Config Store

enable the possibility to store the current amplified controller state (preset and group parameters) as a new configuration (available only when **Enable Configurations** equals Yes)



Use configuration **Store** buttons after loading the appropriate / corresponding LA Network Manager session to the amplified controller

Enable PAVA

enable/disable a section dedicated to Public Address & Voice Alarm applications (also called "evac") to configure permanent monitoring of the amplified controller general state and inputs, and periodic loudspeaker silent monitoring, as required



PAVA parameters are always pushed from the component to the physical unit at connection initialization to enforce the conditions determined for PAVA monitoring, even after amplified controller firmware updates or when the unit is replaced by a spare unit.

Read Impedance

enable the output impedance readout for each speaker section when Speaker Monitoring is enabled (available only when **Enable PAVA** equals Yes)

Audio Network Protocol

select the Audio Network Protocol used by the product ("Milan-AVB" or "AES67").

Refer to the **Using L-Acoustics with Q-SYS & AES67** practical guide for how to use the AES67 page. This document is available on the L-Acoustics website (from the **download** tab on the product page).

AES67 Streams

adjust the number of AES67 streams that the L-Acoustics Q-SYS plug-in shall control (available only when **Audio Network Protocol** equals "AES67")

AES67 Redundancy

display network redundancy controls for AES67 streams (available only when **Audio Network Protocol** equals "AES67")

Disable Meters	unsubscribe from / subscribe to meters notifications from the device Disabling meters may save control processing power on the Q-SYS core.
Disable Presets	allow/inhibit preset layout control
Logging	enable or disable writing status messages to system logs
Control Pins	expand to edit which control pins should be displayed on the component, as necessary The Control Pins tree is dynamically updated according to the device properties.

User Interface description

Double-click the component to open the user interface. The list of tabs depends on the component's properties.

IP Connection

The IP Connection interface is divided into two main sections: Primary and Secondary. Each section includes an IP address input field, a connection status indicator (Available or Active), and a 'Go Active' button. A central 'Automatic Failover' button is also present.

Primary		Secondary	
Connected	IP: 192.168.101.41	IP: 192.168.102.41	
Available (Green)	Active (Yellow)	Available (Green)	Active (Yellow)
Go Active		Go Active	

- **IP**: enter the primary IP address (and secondary IP address when applicable) of the device.
- **Connected**: the plug-in is currently connected to the device.
- **Available**: the device is responding on primary and/or secondary IP addresses and IP connection is possible.
- **Active**: the plug-in is targetting primary or secondary IP address for socket connection.
- **Go Active**: manually failover to primary/secondary IP address.
- **Automatic Failover**: the plug-in automatically fails over to the alternative IP address (if available) when active connection is lost.

Controller Status frame

The Controller Status interface displays device information on the left and status indicators on the right. The Global Status is shown as a large green box with 'OK' text. The Temperature Status is also shown as a green box with 'OK' text. Controls for power mode, display lock, identify, and reboot are located at the bottom.

Controller Status		Global Status	
Type: LA7.16i	FW: 2.14.0.10	OK	
+24V DC input: (Green)	Audio Network Protocol: Milan-AVB		
Network Mode: Redundancy			
Preset Layout: [FACTORY : 1] L2 110		Temperature Status	
On/Standby: Online	Identify: (Yellow)	OK	
Display Lock: (Grey)	Reboot: (Red)		

This frame exposes the main status and controls of the amplified controller: IP address (primary and secondary when applicable), firmware version, device global status (summary of general health and PA/VA status when applicable), socket connection, +24VDC presence (if applicable) and output modules temperature ; preset layout selection, power mode (Online/Standby), front panel display lock, identify (front panel blink), reboot.

Preset Layouts

With 16-channel amplified controllers, a new preset architecture has been developed, introducing the concepts of **enclosure set** and **preset layout**. A preset layout contains one or several enclosure sets (for instance: K2, KARA, X12, KS21, etc.), each enclosure set uses a preset (K2_70, KARA II_FI, X12_MO, KS21_60, etc.). For more information on these concepts, refer to the LA Network Manager Help (References > LA7.16i key concepts).

The **Preset Layout** control of the plug-in displays the list of user and factory preset layouts present inside the connected device, and allows to load one of them.

GPIO

GPIO <i>Setup GPIO modes and functions with LA Network Manager</i>						
	State	Mode	GPI High Func.	GPI Low Func.	GPO Func.	GPO Manual
GPIO 1		GPI	No function	No function	No function	Closed
GPIO 2		GPI	No function	No function	No function	Closed
GPIO 3		GPI	No function	No function	No function	Closed

This section displays the current GPIO configuration and status, and also allows to manually change the GPO state when it is configured as a manual output relay.

The setup of the GPIO is done from LA Network Manager.

AES67

Refer to the **Using L-Acoustics with Q-SYS & AES67** practical guide for how to use the AES67 page. This document is available on the L-Acoustics website (from the **download** tab on the product page).

Input Settings frame

Input Settings

Inputs General Status

OK

AUX input

Input Mode ANA
AES Lock

Media Clock Selection

Media Clock Source AVB in 1
Media Clock Locked

AVB inputs

Stream Status	OK	OK	Not Present	Not Present	Not Present	Not Present	Not Present
Stream Lock (Pri/Sec)							
Locked to Media Clock							

DSP inputs

Source	AVB	AVB	AVB	AVB	AVB	AVB	AVB	AVB	AVB	AVB	AVB	AVB	AVB	AVB	AVB	AVB
AVB Channel	1:1	1:2	1:3	1:4	1:5	1:6	1:7	1:8	2:1	2:2	2:3	2:4	2:5	2:6	2:7	2:8
AUX Channel	LEFT	LEFT	LEFT	LEFT	LEFT	LEFT	LEFT	LEFT	LEFT	LEFT	LEFT	LEFT	LEFT	LEFT	LEFT	LEFT

AVB Stream Lock

AVB Stream Lock																
Fallback AVB > AUX	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable
Fallback Active																
Reset All	Reset	Reset	Reset	Reset	Reset	Reset	Reset	Reset	Reset	Reset	Reset	Reset	Reset	Reset	Reset	Reset
Test All	Test	Test	Test	Test	Test	Test	Test	Test	Test	Test	Test	Test	Test	Test	Test	Test

Signal LEDs

Threshold -50.0dB
Hold (s) 1

-60.0dB	-60.0dB	-60.0dB	-60.0dB	-60.0dB	-60.0dB	-60.0dB	-60.0dB	-60.0dB	-60.0dB	-60.0dB	-60.0dB	-60.0dB	-60.0dB	-60.0dB	-60.0dB
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16

This tab exposes all the input settings controls, including:

- Global input status
- Detailed input status (AES/EBU, AVB input streams, media clock status)
- Source and mapping selection for each DSP input
- Fallback setup, status and control
- Input meters

Output Settings frame

L-Acoustics Amplified Controller 16 channels

Main Inputs Routing Outputs PAVA Configurations

Output Settings

Outputs	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Enclosure	X4	X12	KARA II	KARA II	KARA II	KARA II	KARA II	KARA II	X12	X12	KARA II	KARA II	KARA II	KARA II	KARA II	KARA II
Section	PA	PA	LF	HF	LF	HF	LF	HF	PA	PA	LF	HF	LF	HF	LF	HF
Master Gain	0dB	0dB	0dB	0dB	0dB	0dB	0dB	0dB	0dB	0dB	0dB	0dB	0dB	0dB	0dB	0dB
Mute	Mute	Mute	Mute	Mute	Mute	Mute	Mute	Mute	Mute	Mute	Mute	Mute	Mute	Mute	Mute	Mute
Protect																
Clip																
Limit																
Signal LEDs																
Threshold	-50.0dB	-50.0dB	-50.0dB	-50.0dB	-50.0dB	-50.0dB	-50.0dB	-50.0dB	-50.0dB	-50.0dB	-50.0dB	-50.0dB	-50.0dB	-50.0dB	-50.0dB	-50.0dB
Hold (s)	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

This frame gives access to output gain, mute, and shows limit, clip, and protect states.

If meters are enabled, the section also displays output level meters.

Mute behavior:

- Master Mute (toggle):
 - PUSH: mute the unmuted outputs
 - RELEASE: unmute outputs that were previously muted by the Master Mute button (same behavior as LA Network Manager Master Mute button). Outputs that were muted before the Master Mute button was pushed remain muted after the Master Mute button is released.
- Mute All (toggle):
 - PUSH: mute all outputs
 - RELEASE: unmute all outputs
 - This button automatically turns ON when all outputs are muted.
- Unmute all (trigger): unmute all outputs

Configurations frame

Configurations

Store with Custom Configuration Name

Slot	Configuration Name
201	
202	
203	
204	
205	
206	
207	
208	

Configurations are designed to recall pre-programmed system tunings (including EQ and delay) when LA Network Manager is not used.

Please refer to L-Acoustics Amplified Controller Q-SYS plug-in Technical Bulletin for the procedures on how to create, use and update Configurations.

This frame gives access to the list of configurations available in the unit. When the appropriate properties are enabled, the **Store** and **Recall** buttons are used to respectively save to or load from a configuration slot. Use the top text box to type a name for the target configuration before storing.

! Never recall configurations when LA Network Manager is connected to the device, or setting conflicts will occur. The configuration recall function is designed to substitute for LA Network Manager supervision. Therefore LA Network Manager must not be used when recalling configurations, or must be set to offline mode or disconnected.

! Use configuration **Store** buttons after loading the appropriate / corresponding LA Network Manager session to the amplified controller.

PA/VA System Monitoring frame

PAVA System Monitoring

PAVA Global Status

OK

Internal Faults

- Amplifier
- Output
- Temperature

Input Monitoring

Input Monitoring Status

OK

Input Monitoring Faults

- Pilot Tone
- AES/EBU Lock
- AES/ABU Audio
- AVB Lock

Pilot Tone Detection

Enable Pilot Tone Monitoring

DSP Inputs Selection

1	2	3	4
5	6	7	8
9	10	11	12
13	14	15	16

Detection Frequency: 21000
Detection Resolution: 100
Detection Threshold: -60.0

AES/EBU

Enable AES/EBU Lock Monitoring

Enable AES/EBU Audio Monitoring

AVB

Enable AVB Lock Monitoring

AVB Inputs Selection

1	2	3	4	5	6	7	8
9	10	11	12	13	14	15	16

Output Monitoring

Output Monitoring Status

OK

Enable Speaker Monitoring

Output Faults

- Speaker

Test Interval (s): 58
LF Frequency (Hz): 16
Gain (dBFS): -32.0
HF Frequency (Hz): 20000
Gain (dBFS): -28.0

Outputs

Enclosure Section	L2 LC	L2 LF	L2 HF	L2 HF	L2 LC	L2 LF	L2 HF	L2 HF	L2 LC	L2 LF	L2 HF	L2 HF	L2 LC	L2 LF	L2 HF	L2 HF
High Frequency	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Enable Testing	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable
Open Circuit Detected	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Maximum Impedance	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0
Minimum Impedance	6.00	6.00	6.00	6.00	6.00	6.00	6.00	6.00	6.00	6.00	6.00	6.00	6.00	6.00	6.00	6.00
Short Circuit Detected	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Low Frequency	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Enable Testing	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable	Enable
Open Circuit Detected	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Maximum Impedance	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
Minimum Impedance	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Short Circuit Detected	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

If enabled, this frame gives access to the parameters that must be monitored for installation projects that require PAVA live system check. Definition of the parameters is installation-specific and must be calibrated by a qualified L-Acoustics Application Engineer or a qualified delegate using dedicated tools.

i **The component must be connected to the amplified controller at calibration time.**
This ensures the component is notified of the defined parameters, and is able to push them again during normal operation at connection initialization.

Copyrights

QSC® and Q-SYS™ are trademarks or registered trademarks of QSC, LLC in the U.S. Patent and Trademark Office and other countries.

All third-party trademarks, registered trademarks, product or service names, logos or slogans are the property of their respective owners.