SELF SERVE VIDEO ROUTER

INTERACTIVE TRAINING CONTROL INTERFACE, USE YOUR MOUSE TO HOVER OVER SECTIONS, CLICK TO ACTIVATE

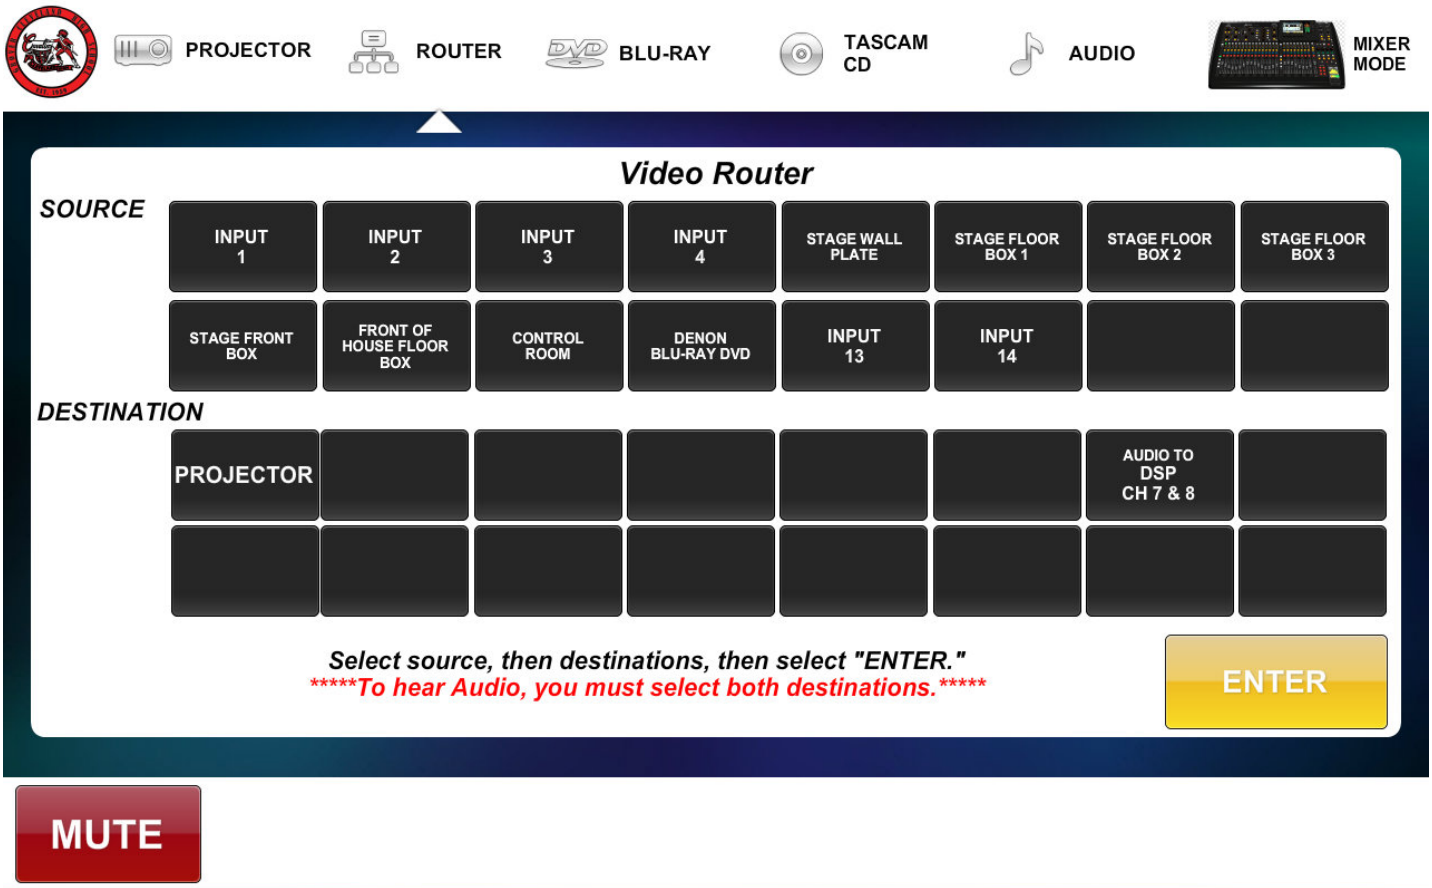

VIDEO ROUTER

AUDIO VISUAL CONTROL SYSTEMS: STANDARD OPERATING PROCEDURE

The Video Router takes full advantage of the DM system. Although your router is not fully populated with inputs and outputs, we have coded the system for future needs.

The DM 16 x 16 Video Router is capable of 16 inputs and 16 outputs. Currently you have 14 inputs and only two outputs.

To use the Router, simply select a source, then select both outputs, the Projector and Audio DSP. Once you do this, activate the router by selecting "Enter."

The Projector receives the Video and the DSP receives the audio.

© Copyright **ACS Advanced Cable Solutions**. All Rights Reserved

Advanced Cable Solutions, 26074 Avenue Hall, Ste.1, Valencia, CA 91355. acscabling.com (https://acscabling.com//)

^
(pow